

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>5</sup> : F16L 9/00, B29B 15/00 B29C 49/00</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 94/11663</b> (43) International Publication Date: 26 May 1994 (26.05.94)</p>
<p>(21) International Application Number: PCT/US92/09994 (22) International Filing Date: 17 November 1992 (17.11.92)</p> <p>(71) Applicant (for all designated States except US): PROPRIETARY TECHNOLOGY, INC. [US/US]; 25240 Lahser Road, Suite One, Southfield, MI 48034 (US).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): BARTHOLOMEW, Donald, Dekle [US/US]; 35442 Jefferson, 400 On the Lake, Unit 32C, Mt. Clemens, MI 48045 (US).</p> <p>(74) Agents: MILLER, H. Keith et al.; Harness, Dickey &amp; Pierce, P.O. Box 828, Bloomfield Hills, MI 48303 (US)</p>	<p>(81) Designated States: BR, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE).</p> <p><b>Published</b> <i>With international search report.</i></p>	
<p>(54) Title: SELF LOCKING SLITTED CORRUGATED TUBING</p> <div data-bbox="319 629 727 901" data-label="Image"> </div> <p>(57) Abstract</p> <p>The present invention relates to corrugated protective sleeves (10) and for enclosing lengths of conducting equipment, such as cables, wiring and tubing, and more particularly to corrugated sleeves (10) and formed of a single piece of plastic. The corrugated protective sleeve includes an inner surface (14) and an outer surface (20) which is slit open to form male (36) and female (26) locking members which are adjoined once the conducting equipment has been inserted therein. Various methods for providing the locking areas as a part of the corrugated tubing are shown.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	CN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

SELF LOCKING SLITTED CORRUGATED TUBINGBACKGROUND OF THE INVENTION1. Field of the Invention

The invention relates to a corrugated protective sleeve for enclosing lengths of conducting equipment, such as cables, wiring and tubing, and more particularly, to a  
5 corrugated plastic sleeve adapted to have male and female locking members located along first and second longitudinal edges which allow the corrugated plastic sleeve to be closed upon fully inserting the male member within the corresponding female member.

2. Description of Related Art

Many protective tubular enclosures having longitudinal points of attachment are  
10 known. Generally, the tubular enclosures include sheets of material wrapped around elongated objects such as wiring, cables or other forms of tubing which are closed along the longitudinal edges to provide a sealed environment for the object or objects contained therein. For example, U.S. Patent Nos. 1,895,133 which issued to Quarnstrom on January 23, 1993; 2,067,665 which issued to Holt on January 12, 1937; 3,625,259 which  
15 issued to Kennedy on December 7, 1971; and 4,944,976 which issued to Plummer on July 31, 1990 all disclose various designs of tubular enclosures, however, none of the aforementioned patents disclose the use of corrugated tubing having male and female locking members. Furthermore, the known patents which disclose corrugated tubular enclosures such as United States Patent No. 4,513,787 do not disclose tab and detent  
20 locking between with the male and the female locking member.

Accordingly, it is the primary object of the present invention to provide a corrugated protective sleeve which is capable of enclosing relatively long lengths of conducting devices.

It is another object of the present invention to provide a one-piece corrugated  
25 protective sleeve which is selectively openable and closeable.

It is another object of the present invention to provide a corrugated tube which is closeable and may be permanently sealed.

It is another object of the present invention to provide a corrugated protective sleeve which is readily producible at a relatively low cost.

30 It is yet another object of the present invention to provide a simple and inexpensive method of producing the corrugated tubing of the present invention.

### SUMMARY OF THE INVENTION

To achieve the foregoing objects, the present invention provides a corrugated protective sleeve assembly made by blow molding plastic. The corrugated sleeve generally comprises a single piece of corrugated plastic having a longitudinal body with alternating, enlarged and reduced diameter portions, and an inner surface and an outer surface, wherein the outer surface contains a plurality of projecting members which serve to lock the tube together about first and second longitudinal edges.

The corrugated sleeve of the present invention is formed by extruding a single length of relatively round plastic tubing between a plurality of first and second moving mold plates arranged along a linear path and adjoining the mold plates for a specific amount of time. A longitudinal cavity having sections of successive enlarged and reduced diameter is provided when the first and second mold plates are adjoined along their mating faces. The first plurality of mold plates are provided with a male locking portion located below the level of the mold plates face that contacts a second plurality of mold plates. The second mold plates include a portion of mold cavities which contain a plurality of female mating lug and recess portions, respectively, disposed perpendicularly to the second plate's face.

The plastic tubing is then blow molded such that the plastic flows within the mold plates and becomes contoured according to the dimensions of the mold plates. The enlarged and reduced diameter portions are formed and the male and female parts of the locking portions become filled by displaced plastic to form the outward projections contained on the outer surface of the corrugated sleeve.

The corrugated protective sleeve is adapted to have first and second longitudinal edges by slitting the corrugated plastic sleeve along a longitudinal line which is substantially parallel to the tubes central axis. The protective sleeve is made of a relatively deformable plastic which allows for deformation of the corrugated sleeve without damaging the contents contained within the sleeve. A plurality of the corrugated sections contain outwardly projecting tab members which are referred to herein as male locking members. Female locking members extend outwardly from the body portion and are formed upon slitting the sleeve along the longitudinal axis. Typically, a corresponding number of the female locking members are provided with a detent or aperture into which the tab portions of the corresponding male locking member projects

to reduce the likelihood of an undesired disconnection between the male and female locking members.

Additional objects and advantages of the present invention will become apparent from a reading of the detailed description of the preferred embodiment which make reference to the following set of drawings in which:

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a perspective view of a first embodiment of a corrugated sleeve of the present invention shown exiting a first set of molding plates used to form a corrugated sleeve;

10 Fig. 2 is a partial cross-sectional view demonstrating the formation of the first embodiment of a corrugated sleeve within the molding plates;

Fig. 3 is a perspective view demonstrating the corrugated tube produced by the molding plates of Figure 1;

15 Fig. 4 is a perspective view demonstrating the formation of spaces on the reduced diameter portions along a longitudinal line;

Fig. 5 is a partial cross-sectional view of the corrugated tube of Figures 3 and 4;

Fig. 6 is a partial cross-sectional view demonstrating the insertion of a male locking member into the corresponding female locking member;

20 Fig. 7 is a partial cross-sectional view demonstrating the sealing together of the male and female locking portions;

#### **BRIEF DESCRIPTION OF THE PREFERRED EMBODIMENT**

Referring to Figures 1 and 2, the mold plates used in the process for manufacturing a first embodiment of the corrugated sleeve 10 of the present invention is shown at various stages of the manufacturing process. The corrugated sleeve 10 of the present invention is formed by positioning a single length of relatively round plastic tubing between a plurality of first and second mold plates, 50 and 50', respectively, arranged along a linear path and adjoining the mold plates for a specific amount of time. Since the first and second mold plates of the present have numerous similar features, like reference numerals will be employed to describe like features. The mold plates are typically rectangular in shape having relatively flat first and second ends 54, 56, 54' and 56'. A longitudinal cavity having sections of successive enlarged and reduced diameters,

60 and 62, and 60' and 62', respectively, is provided when the first and second mold plates are adjoined along their mating faces 58 and 58'. The first plurality of mold plates 50 are provided with a ledge portion 64 located below and substantially parallel to the level of the face 58 on each of the enlarged diameter sections 60. Disposed  
5 perpendicularly between the first plate's face 58 and the ledge portion 64 are a plurality of lugs 66 of plate 50 and recesses 68' of plate 50'. The second mold plates 50' include a plurality of mating lug and recess portions 66' and 68', respectively, disposed relatively perpendicular to the second plate's face 58'. Gaps 72' are provided along the enlarged diameter sections 60 and 60' between the corresponding lugs and recesses of the first and  
10 second mold plates upon adjoining the corresponding first and second plates. The first mold plates 50 further include downwardly extending members 66 which extend to meet plate 50' and form the gaps 72'.

The plastic tubing is then blow molded such that the plastic flows within the mold plates and becomes contoured according to the dimensions of the mold plates. The  
15 enlarged and reduced diameter portions are formed. The material around gaps 72' becomes filled by the displaced plastic to form the outward projections 22 contained on the outer surface 20 of the corrugated sleeve 10. While it is preferred that each enlarged diameter section be provided with an outwardly projecting tab member and a corresponding female outward projection, it will be understood that both the enlarged and  
20 reduced diameter sections could be provided with an outwardly projecting tab member and corresponding female outward projection. The outward projecting tab may be formed with a detenting area 72'. As demonstrated by the corrugated tube shown in Figure 3, the reduced diameter portions 62 and 62' of the mold plates 50 and 50' provide the reduced diameter portions 18 of the tube with open spaces 24. In the alternative  
25 embodiment of tube 10 (Figure 4), these open spaces 24 are cut into the corrugated tube 10 after the tube has been blow molded and a special cutting tool 74 has been used to remove material from the tube 10. A portion of plastic sleeve 10 is shown in Figure 5.

Referring to Figs. 6 and 7, the corrugated plastic sleeve 10 is slit along a longitudinal line 40 by a slitting tool 78 to form first and second longitudinal edges 32  
30 and 44, respectively. The female locking members 26 are provided with a gap 24 and an aperture 30 to accommodate the projecting tabs 34 of the male locking members. The apertures 30 are formed by the cutting tool 78.

Once the conducting equipment 80 has been positioned within the corrugated sleeve 10 and has come to rest upon the inner surface 14, the male and female locking members can be adjoined to close the corrugated sleeve as shown in Figure 6. The male locking members 36 are inserted into the aperture 30 of the corresponding female locking members 26. The male locking members 36 are advanced within the apertures 30 until the tab members 34 slide into the gaps 24. At this point, the top edge 35 of the projecting tabs 34 lock under the blocking wall 48 provided on the female locking member.

Referring to Figures 6 and 7, with the male locking members adjoined to the female locking members, additional sealing 84 can be accomplished by plastic welded to the outer surface of the male locking member. The tab members can also be plastic welded to the outwardly projecting portions to further secure the male and female locking members together.

While the above description constituted the preferred embodiments of the present invention, it will be appreciated that the invention is susceptible to modification, variation and change without departing from the proper scope and entire meaning of the accompanying claims. For example, it is contemplated that an adhesive can be utilized to permanently secure the male and female locking members together either with or in place of plastic welding.

CLAIMS

1. A corrugated sleeve for retaining conducting equipment such as cables, wiring, tubing and the like, comprising:
  - a sleeve formed of a single piece of plastic of generally tubular shape having a longitudinal portion which includes an inner surface, an outer surface and means for joining a plurality of corresponding male and female locking members which are formed by slitting the sleeve;
    - said male locking members extend from said slit sleeve along a first longitudinal edge, wherein a plurality of said male locking members are provided with an outwardly projecting tab;
    - said female locking members extend along a second longitudinal edge and having a shape to receive said male locking members, said female locking members include a means to lock said male locking members;
    - whereby said male locking members are adjoined to said corresponding female locking members by inserting said male locking members into said female locking members.
2. The corrugated sleeve of claim 1, wherein said means for retaining said male locking members include apertures.
3. The corrugated sleeve of claim 1, wherein said means for retaining said male locking members include detents.
4. The corrugated sleeve of claim 1, wherein said male and female locking members are permanently adjoined by adhering said male and female locking members together upon connection.
5. The corrugated sleeve of claim 4, wherein said male and female locking members are welded together.
6. The corrugated sleeve of claim 5, wherein said male and female locking members are glued together.



7. A method of making a corrugated sleeve useful for enclosing lengths of conducting equipment such as cables, wiring and tubing, comprising the steps of:

- 5 (a) providing a plurality of mating first and second mold plates having successive enlarged and reduced diameter sections, said first and second mold plates including alternating lugs and lug receiving and locking areas;
- (b) removing said corrugated sleeve from said mold plates and slitting said corrugated sleeve to form first and second longitudinal edges;
- (c) providing a plurality of said diameter sections with an outwardly projecting tab male member; and
- 10 (d) providing a corresponding number of outwardly projecting tab members with means for retaining said tab male members.

8. The method of claim 7, wherein said means for retaining said tab members further comprise apertures.


9. The method of claim 7, wherein said means for retaining said tab members further  
15 comprise detents.


10. The method of claim 7, wherein said tab members are formed by punching out a portion of said diameter section proximate to said first longitudinal edge and cold bending outwardly said punched out portion.



11. A mold plate assembly for the production of a corrugated sleeve, comprising:  
a plurality of first and second mold plates arranged along a linear path, each of which includes a body having a longitudinal cavity with successive sections of enlarged and reduced diameter and a surface for mating said first and second mold plates;
- 5       said first mold plates including a ledge located below the level of said mating surface and a plurality of lugs and recesses extending between said ledge and said mating surface; and
- said second mold plates including a projection which extends radially from said body which contains a plurality of lugs and recesses;
- 10       whereby upon aligning said mating surfaces the lugs of the first and second mold plates become aligned with the corresponding recesses of the first and second mold plates.
12. The mold plate assembly of claim 11, wherein a gap is provided between said lugs of the first mold plates and the corresponding recesses of the second mold plates.
13. The first and second mold plates of claim 11, wherein said mold plates are formed
- 15       of metal.
14. The first and second mold plates of claim 11, wherein said mold plates are formed of a ceramic material.
15. The mold plate assembly of claim 11, wherein said surfaces for mating are flat.
16. The mold plate assembly of claim 11, wherein said body has a generally
- 20       rectangular shape.
17. The mold plate assembly of claim 11, wherein said corresponding first and second mold plates contain the same number of lugs and recesses.
18. The mold plate assembly of claim 11 wherein said lugs have a generally rectangular shape.


19. The mold plate assembly of claim 11, wherein said recesses have a generally rectangular shape.
20. A corrugated sleeve having alternating enlarged and reduced diameter sections for retaining conducting equipment such as cables, wiring, tubing and the like, comprising:
- 5 a sleeve formed of a single piece of plastic having a longitudinal portion which includes an inner surface, an outer surface and means for joining a plurality of corresponding male and female locking members which are formed by slitting the sleeve along a longitudinal dividing line;
- said male locking members extend from said body portion along a first
- 10 longitudinal edge, wherein a plurality of said male locking members are provided with an outwardly projecting tab;
- said female locking members extend along a second longitudinal edge; and
- include gap means for receiving said male locking members; and
- means for retaining said tab members.
- 15 21. The corrugated sleeve of claim 20, wherein said means for retaining said tabs include apertures.
22. The corrugated sleeve of claim 20, wherein said means for retaining said tabs include detents.
23. The corrugated sleeve of claim 20 wherein said male and female locking
- 20 members are permanently adjoined by adhering said male and female locking members together upon connection.
24. The corrugated sleeve of claim 23, wherein said male and female locking members are welded together.
25. The corrugated sleeve of claim 23, wherein said male and female locking
- 25 members are glued together.

26. A method of making a corrugated sleeve having alternating enlarged and reduced diameter sections useful for enclosing lengths of conducting equipment such as cables, wiring and tubing, comprising the steps of:
- 5 (a) providing a plurality of mating first and second mold plates having successive enlarged and reduced diameter sections, said first and second mold plates including alternating lugs and recesses;
  - (b) closing said first and second molds and blow molding said tubing to form a corrugated sleeve having a plurality of outwardly projecting members;
  - 10 (c) providing a plurality of said diameter sections with an outwardly projecting tab member;
  - (d) providing a corresponding number of outwardly projecting tab members with means for retaining said tab members; and
  - (e) removing said corrugated sleeve from said mold plates and slitting said corrugated sleeve to form first and second longitudinal edges.
- 15 27. The method of claim 27, wherein said means for retaining said tab members further comprise apertures.
28. The method of claim 27, wherein said means for retaining said tab members further comprise detents.
29. The method of claim 7 which includes the step of providing locking means on said  
20 sleeve by removal of selected portions from said sleeve.
30. The method of claim 26 which includes the step of blow molding said sleeve within said mold plates.


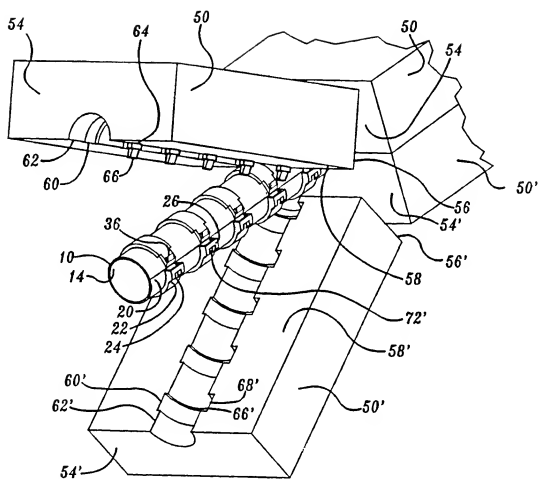
*Fig - 1*

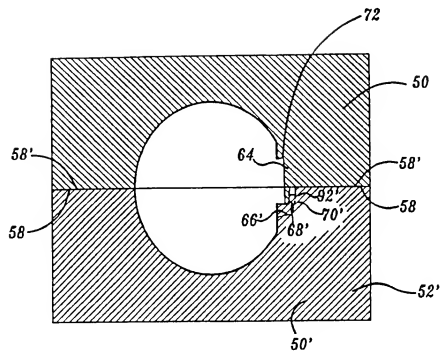*Fig - 2*

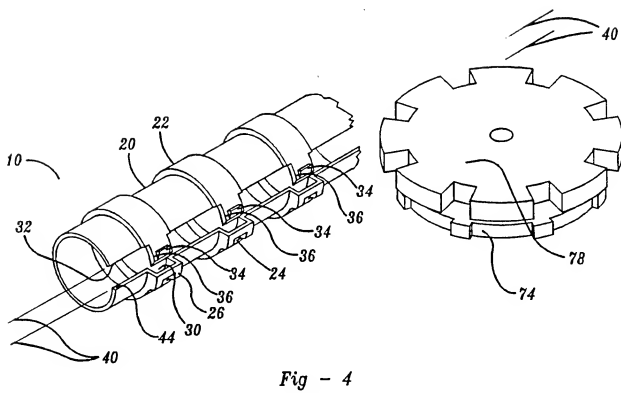

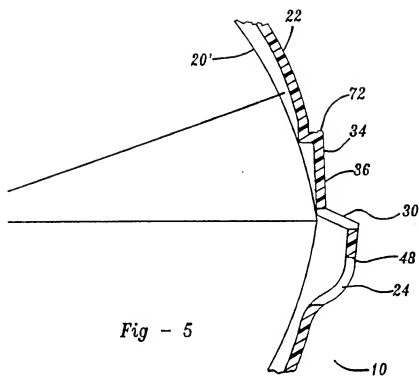



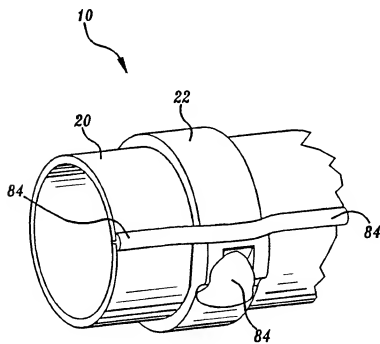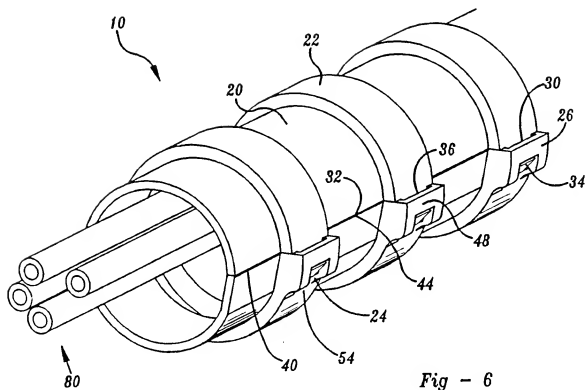

## INTERNATIONAL SEARCH REPORT

PCT/US92/09994

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : F16L 9/00; B29B 15/00; B29C 49/00

US CL : 138/166; 204/566; 425/539

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 138/166; 204/566; 425/539; 138/121, 128, 151, 169, 170, 173; 425/527, 531, 541

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Automated Patent Search: (tube, pipe, conduit, or hose), blow molding, corrugated, and 138/class

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US, A, 3,336,950 (FOCHLER) 22 August 1967. See the entire document.	<u>1-6, 20-25</u> 7-9, 26-30, 10
X Y	US, A, 4,789,322 (CHAN ET AL.) 06 December 1988. See the entire document.	<u>11, 12, 15-19</u> 7-9, 26-30, 13, 14, 10
Y	US, A, 4,214,147 (KRAVER) 22 July 1980. See the entire document.	7-9, 26-30, 10
Y	US, A, 4,509,911 (ROSEMBAUM) 09 April 1985. See the entire document.	10
A	US, A, 3,208,478 (BAINES) 28 September 1965.	

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	* "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* "A" document defining the general state of the art which is not considered to be part of particular relevance	* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
* "E" earlier document published on or after the international filing date	* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combinations being obvious to a person skilled in the art
* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	
* "O" document referring to an oral disclosure, use, exhibition or other means	
* "P" document published prior to the international filing date but later than the priority date claimed	* "A" document member of the same patent family

Date of the actual completion of the international search

18 FEBRUARY 1993

Date of mailing of the international search report

03 MAR 1993

 Name and mailing address of the ISA/US  
 Commissioner of Patents and Trademarks  
 Box PCT  
 Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

M JAMESHOOK

Telephone No. (703) 308-2913

Form PCT/ISA/210 (second sheet) (July 1992)\*

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US92/09994

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 3,747,352 (MAROSCHAK) 24 July 1973.	
A	US, A, 3,859,025 (MAROSCHAK) 07 January 1975.	
A	US, A, 3,870,774 (MAROSCHAK) 11 March 1975.	
A	US, A, 4,037,626 (ROBERTS, JR.) 26 July 1977.	
A	US, A, 4,667,702 (ROTH) 26 May 1987.	
A	US, A, 4,766,662 (BRADSHAW ET AL.) 30 August 1988.	
A	US, A, 4,838,318 (KARAKAWA) 13 June 1989.	
A	US, A, 4,877,224 (WATTS) 31 October 1989.	
A	US, A, 5,059,109 (DICKHUT ET AL.) 22 October 1991.	